


PRODUCT ADVANTAGE
INTRODUCTION




Double interlocking gasket
Anti-pinch design

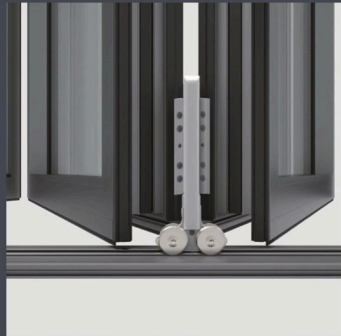


High-low track design
Good water tightness



Side adjuster
Fine adjustment across the width

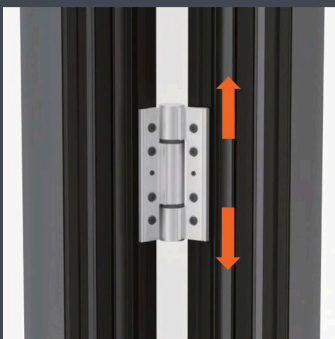

Adjustable hinge design
Fine adjustment in height

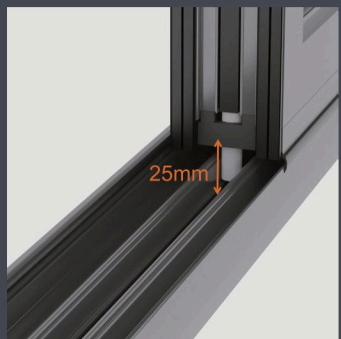


Top and bottom shoot bolts
Adds strength, resists super typhoons



Stainless steel rollers and track
Stable, quiet and smooth running



Catch stops mis-operation
Keeps use safe



Narrow sightline design



Flyscreen door solution

PERSONALIZED
CUSTOMIZATION

Custom colours

When you choose a VBM folding door you choose individuality. The VBM standard range covers about 30 RAL colours, in gloss and matt texture, and any door can be matched to the building inside and out.


	RAL 1015		RAL 3011		RAL 5003		RAL 5008
	RAL 5014		RAL 6005		RAL 6009		RAL 7004
	RAL 7006		RAL 7015		RAL 7016		RAL 7021
	RAL 7024		RAL 7035		RAL 7038		RAL 7039
	RAL 7040		RAL 8017		RAL 8019		RAL 8022
	RAL 8077		RAL 9001		RAL 9003		RAL 9004
	RAL 9005		RAL 9006		RAL 9007		RAL 9010
	RAL 9011		RAL 9016				

Profiles:
Imported powder coating
RAL chart colour to order
PVDF paint to order
Hardware:
Black, white, silver
Colours to order




INITIATE SCHEME COMBINATION

Special opening schemes

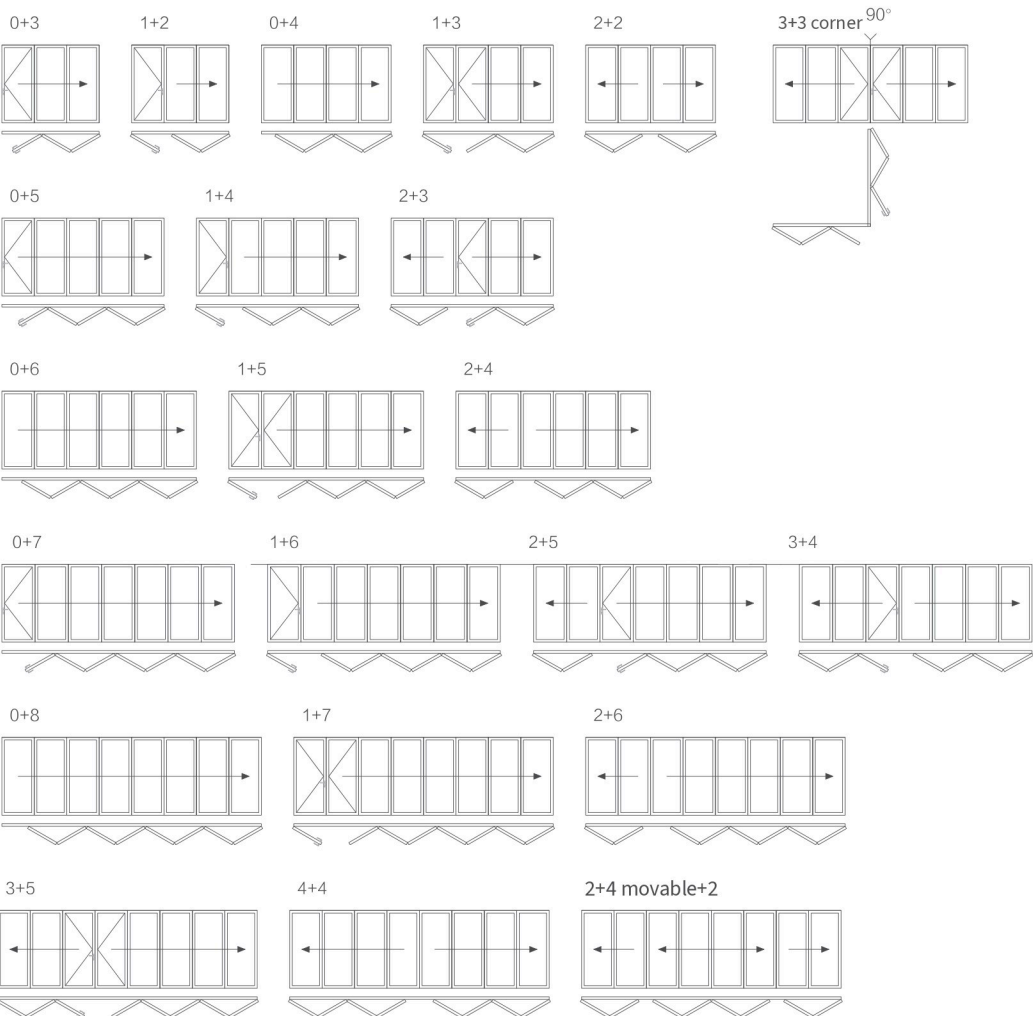

VBM Building Systems

No.1 Wuyang Road, Songjiang, Shanghai
Web: www.vbmsolutions.com.cn
Email: Foldingking001@gmail.com

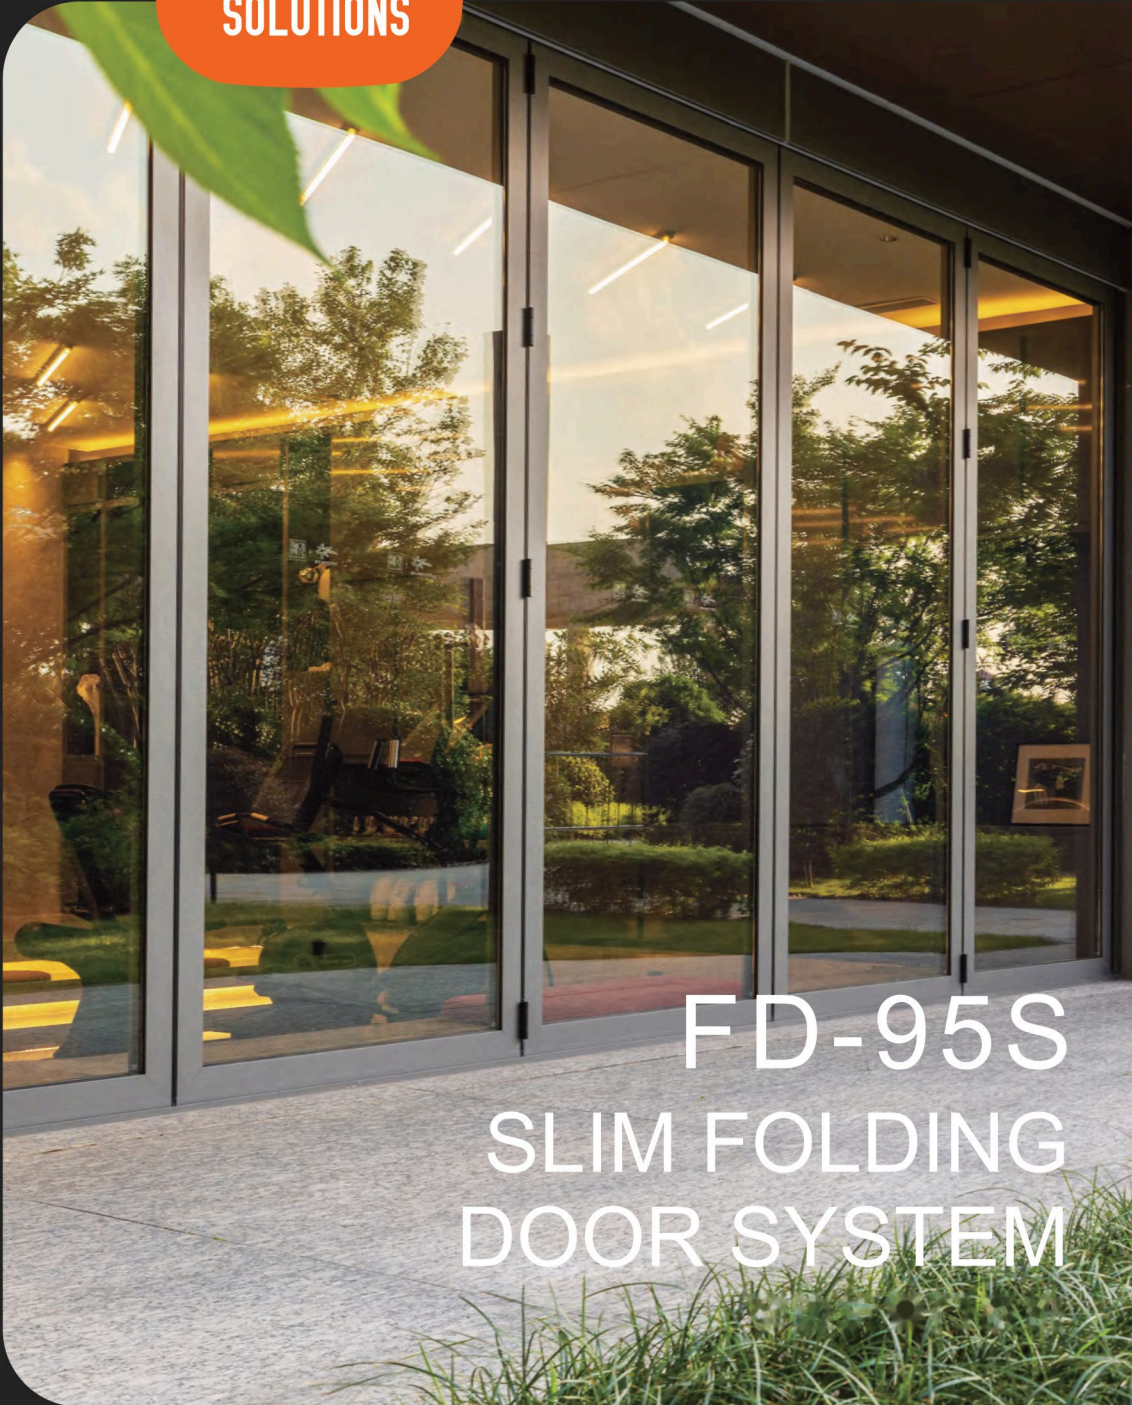

FD-95S
SLIM FOLDING
DOOR SYSTEM


Freephone 400-808-1980



VBM INTRODUCTION

VBM (View Building Master) supplies varied window and door systems, including folding glass windows and folding glass doors, for every kind of building. We serve architects, developers and end users over the whole life cycle, from R&D to project management.

VBM answers the demands that China's varied regional climates and extreme weather put on windows and doors. We draw on the world's top folding-system supply chains for doors that suit the local climate and local habits, from process to aesthetics and performance to function, for healthy living.

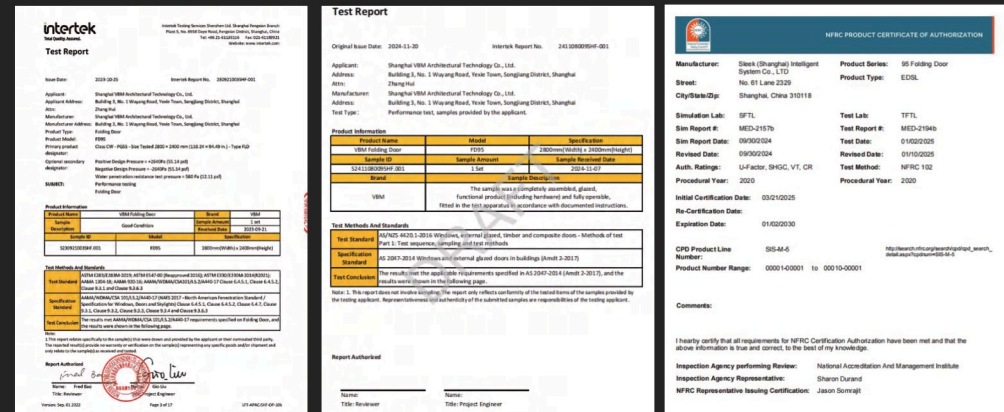

FD-95S Folding door system parameters

- ① Max panel width 1200mm
- ② Max height 3500mm
- ③ Leaf capacity 120KG
- ④ Any odd or even panel combination
- ⑤ Bottom track: high-low or flat
- ⑥ Glass thickness 24mm, 32mm, 42mm



CLASSIC ENGINEERING CASES

Bund 18	Tian'an 1000 Trees	Taikoo Li Sanlitun	Sunac Moganshan Valley
Qiantan Clubhouse	HKRI Taikoo Hui	Universal Studios	Bluetown Jun'anli
Xinzhuang Metro Station	Linkong Talent Apartments	Beijing Conrad	China Overseas Wenhui
Incity	Zizhu Science Park	Tianjin Chow Tai Fook	Vanke Sky City